


Brochure October 2022

CABLE HANDLING



CABLE PROTECTION

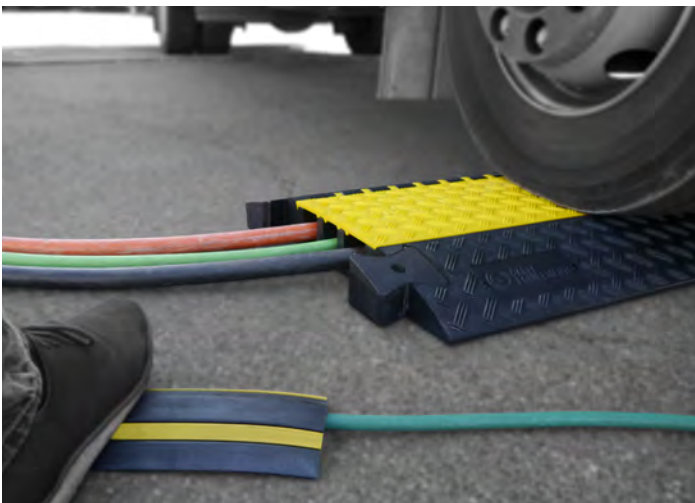


COILING MACHINES



AUTOMATIC CABLE REELS



WIRING - CABLE DRAW

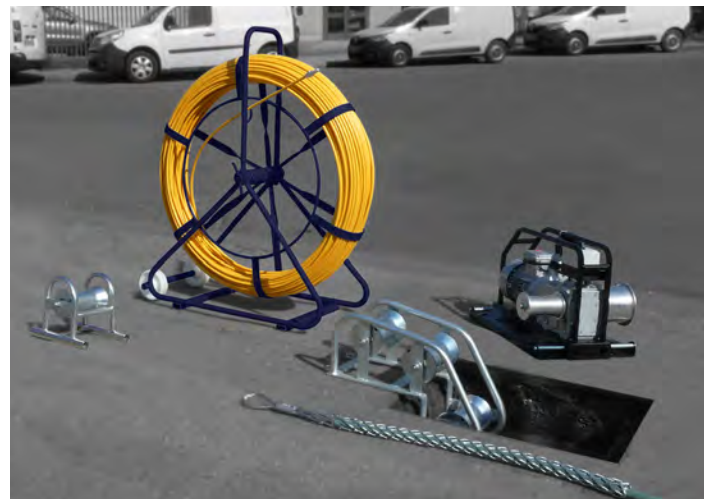

CABLE HANDLING

Cable drum unwinders



LIGHT 120®

LIGHT 220®


LIGHT 320®

TECHNICAL SPECIFICATIONS

| | Essential Feature | Code | Max weight (kg) | Cable Drums Ø (mm) | Max width (mm) | Weight (kg) |
|----------------|----------------------------------|---------------------|-----------------|--------------------|----------------|-------------|
| LIGHT 120® | The most economical | EL120 | 120 | 300 to 600 | 435 | 5,5 |
| PRIMO 200 | 2 shoes | E3004200 | 200 | 200 to 700 | 580 | 4,9 |
| BLUE SPEED 190 | For damaged drums | BS190 | 190 | - | - | 1,1 |
| COMPACT 200 | Transforms in just 3 clicks | EC200 | 200 | 200 to 700 | 580 | 5,9 |
| OT200 | Classic unwinder | EDR0200 | 200 | 400 to 800 | 520 | 15 |
| LIGHT 220® | The original | EL220 | 220 | 300 to 1 050 | 540 | 7,6 |
| ST1 | Unwinder trolley | E3008010 | 300 | 400 to 1 050 | 800 | 31 |
| LIGHT 320® | Light «XL» | EL320 | 320 | 300 to 1 200 | 610 | 12,6 |
| BLUE SPEED 380 | For drums and cable coils | BS380 | 380 | - | - | 6,8 |
| ST2 | Unwinder trolley | E3008020 | 450 | 900 to 1 400 | 800 | 34 |
| BLUE SPEED 500 | For damaged drums | BS500 | 500 | - | - | 3,0 |
| OT800 | Classic unwinder | EDR0800 | 800 | 600 to 1 050 | 575 | 24 |
| 1T200 | Classic unwinder | EDR1T200 | 1 200 | 600 to 1 200 | 770 | 38 |
| STG 1500 | Strong capacity and dismountable | E3004150 | 1 500 | 500 to 1 400 | 950 | 28 |
| AXO 1600 | Worm drive jacks | EAX016-18... | 1 600 | 600 to 1 600 | 1 100 | 75 |
| STG 2500 | Strong capacity and dismountable | E3004250 | 2 500 | 500 to 1 650 | 950 | 38 |
| AXO 6 TONNES | Hydraulic jacks | EAX060-27R | 6 000 | 750 to 2 700 | 1 450 | 169 |
| 5 à 7 T | Very large capacity | OBDR5070 | 7 000 | 750 to 2 200 | 1 350 | 139 |
| 7 à 10 T | Very large capacity | OBDR7010 | 10 000 | 750 to 3 400 | - | 246 |
| AXO 10 TONNES | Hydraulic jacks | EAX100-22... | 10 000 | 400 to 2 200 | 1 350 | 148 |
| | | EAX100-32... | 10 000 | 400 to 3 200 | 1 900 | 176 |



BLUE SPEED

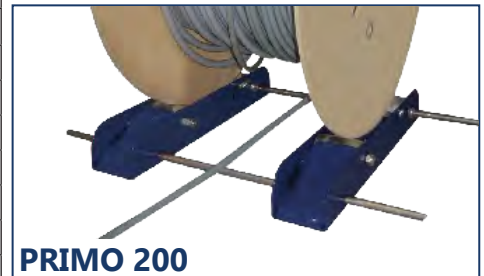


PRIMO 200



COMPACT 200



STG 1500

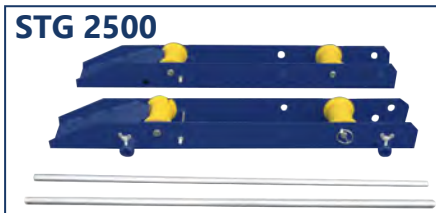

STG 2500

Unwinder with rollers



OT200 - OT800 - 1T200 - 5 à 7T - 7 à 10T

Unwinder trolleys



ST2

ST1

AXO



AXO1,6T - Ø 1600

Available for RENT



AXO 6T - Ø 2700



AXO 10T - Ø 2200



AXO 10T - Ø 3200

CABLE HANDLING

Site coil holders

QUAD range

NOVOQUAD



E3500900

QUAD®



E3500333

MINOQUAD



E3500300

UNIQUAD 300



E3500100

UNIQUAD 400



E3500104

ESCABOCABLE




E3500660

SATELLITE®



E3500750

MINOCABLE



E3500510

Storage

Spools with straps



E3300...

BOBI®



E3090300M




E3090400M



E3090600M




E3090000M

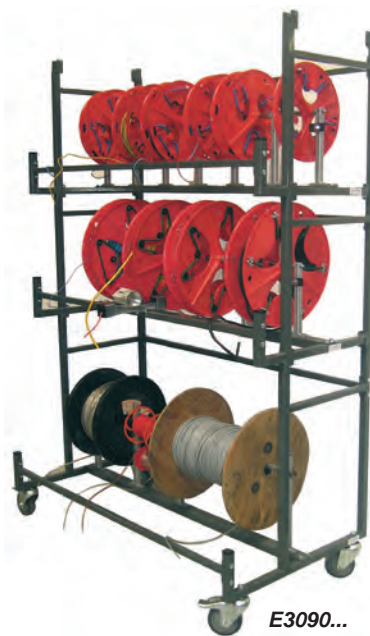


E3090...

Cable display rack CABLERACK®

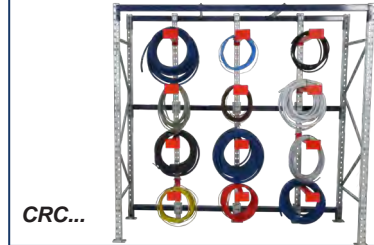

CRC...

PRIMO-STOCK

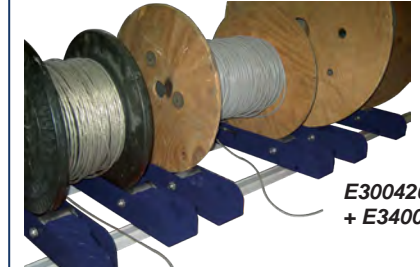

E3004200S
+ E3400010

Cable drum rack CABLERACK® light version



CRL...

Cable drum rack CABLERACK®



Coilers with cranks



EM...

Cable cutters

All cable cutters manual or with battery



New



Cable cutter head Ø 55mm adaptable on cordless screwdriver-drill BOSCH GSR 12V-35 FC FlexiClick

CC55B - CC55T

Spool and cable drums



Indicate the material, the Ø of the flanges, the Ø of the drum, the effective width and the quantity

CABLE HANDLING

Measuring devices

M3




E3350004

Handle model
M3-M



E3350010

M50

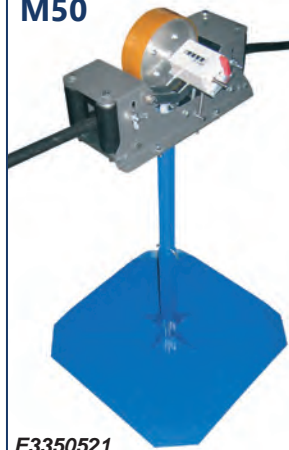


E3350521

Odometer



E3360...

M35



E3350354

CM3000



EVC3000

Manual coiling

PKCO




E3001...

PKDE



E3002...


SPIROCABLE

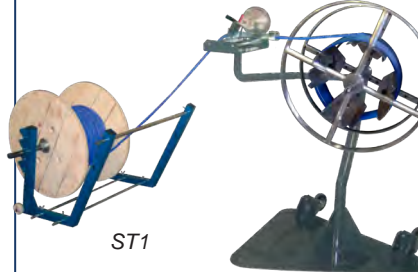

ST1

E3005...


MANU-COCCI®

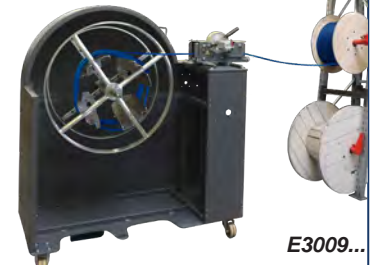

E3009...

COILING MACHINES

MOTO-COCCI® (coiler)

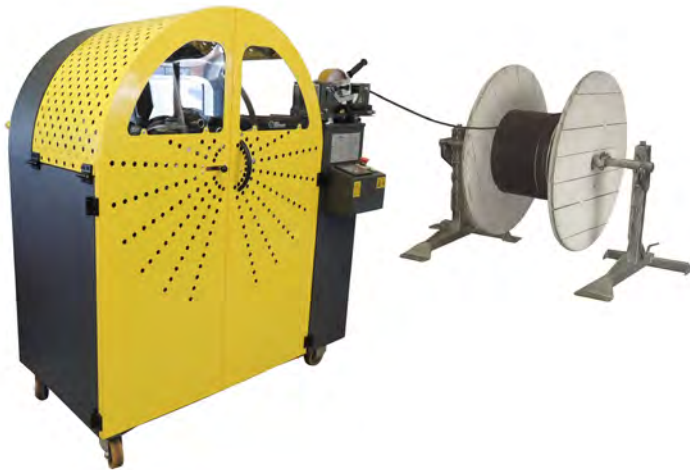

ECO-COCCI (400 kg)



All machines until 10 tons



Length-wise



Maintenance - Security
contract



WIRING - CABLE DRAW

SUNNY®

New



Six ranges, length up to 500 meters :

| Range | Ø (mm) | Wheels | Finish | Length (m) | Code |
|-------|--------|--------|-------------|------------|--------|
| FV1 | 4,5 | No | Epoxy paint | 30 to 60 | FV1... |
| FV2 | 6 | No | | 60 to 100 | FV2... |
| FV3 | 9 | Yes | | 100 to 300 | FV3... |
| FV3 | 11 | Yes | 150 to 300 | FV3... | |
| FV4 | 7,2 | No | Galvanized | 40 to 120 | FV4... |
| FV5 | 9 | No | | 40 to 150 | FV5... |
| FV6 | 11 | Yes | | 120 to 500 | FV6... |
| FV6 | 11 | Yes | | 120 to 500 | FV6... |

Cable pulling grips



*All other models on demand

| Use | For cable Ø | Material | Work length | Code |
|----------------------|-------------|------------------|-------------|--------------|
| Tertiary Residential | 6 to 9 mm | Galvanized Steel | 120 mm | CHT0609A12LS |
| | 9 to 12 mm | | 180 mm | CHT0912A18LS |
| | 12 to 15 mm | | 230 mm | CHT1215A23LS |
| | 15 to 19 mm | | 280 mm | CHT1519A28LS |
| Construction | 10 to 20 mm | | 600 mm | CHV1020A60 |
| | 20 to 30 mm | | 600 mm | CHV2030A60 |
| | 30 to 40 mm | | 600 mm | CHV3040A60 |
| | 40 to 50 mm | | 600 mm | CHV4050A60 |

Fiberglass pulling rods in a carter

New

WALLY BASIC



Code **WBASIC**

- Fiberglass Ø 3 mm
- Length 30 meters
- 1 mixed guide head Ø 6 mm
- 1 "funnel" wire puller

WALLY PRO



Code **WPRO**

- Fiberglass Ø 3 mm
- Length 30 meters
- at one end, guide head Ø 6 mm acting as an eyelet
- eyelet at the other end



Common accessories

| | |
|--|-----------|
| CONFORT kit (guiding head Ø7, GRIP, cable pulling grip Ø6-9) | WCONF |
| Lubricant 200ml | WLUB200 |
| Eyelets (pack of 10) | WOEIL10 |
| Flexible guiding head Ø 4 mm | WTETE04 |
| Flexible guiding head Ø 7 mm | WTETE07 |
| Flexible guiding head Ø 10 mm | WTETE10 |
| Flexible guiding head Ø 13 mm | WTETE13 |
| GRIP | WGRIP |
| Cable pulling grip Ø 6 to 9 mm | WCHAUSS69 |
| REPAIR kit (3g glue, 2 tips, 2 connectors) | WREP |
| M5 threaded ends and connectors (pack of 5 each) | W5E5R |
| Glue (3g tube) | WCOLLE3 |
| Spare fiberglass rod (30 meters, Ø 3mm, eyelet, guiding head Ø7) | WAIG330 |



Pulleys

New

Simple steel pulley



PL1AC-LIN

Simple pulley nylon wheel



PL1NY-LIN

Triple steel pulley




PL3AC-ANG

Steel pulleys for corners and edges



PL1AC-BDC



PL3AC-BDC

Cable drums trailers

14 models for drums until 5 tons and Ø 4,10 meters.

Codes S...



Electric winches

3 models : pulling force 500kN, 800kN or 2000kN.

Codes CAB...




AUTOMATIC CABLE REELS

The UNMISSABLE: electrical power supply reels

New

What our code means:

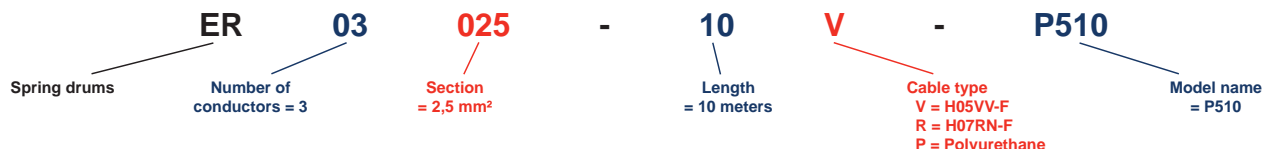

3G1,5²



| Model | Length | Cable type | IP | Plugs (cable) | Plugs (power) | Code |
|-------|--------|------------|----|---------------|---------------|------------------|
| P105 | 6 m | H05VV-F | 42 | Option | Option | ER03015-06V-P105 |
| P506 | 10 m | H07RN-F | | Female 2P+T | Male 2P+T | ER03015-10R-P506 |
| P301 | 11 m | | | | | ER03015-11R-P301 |
| A315 | 15 m | H05VV-F | | Option | Option | ER03015-15V-A315 |
| P315 | | H07RN-F | | Option | Option | ER03015-15V-P315 |
| P421 | 22 m | H07RN-F | | Female 2P+T | Male 2P+T | ER03015-22R-P421 |
| P803 | | | | Option | Option | ER03015-22R-P803 |



3G2,5² - IP42



| Model | Length | Cable type | IP | Plugs (cable) | Plugs (power) | Code |
|-------|--------|------------|----|---------------|------------------|------------------|
| A325 | 8 m | H07RN-F | 42 | Option | Option | ER03025-08R-A325 |
| P325 | 10 m | | | | | ER03025-10R-P325 |
| P510 | | H05VV-F | | Option | Option | ER03025-10V-P510 |
| P302 | 12 m | H07RN-F | | Female 2P+T | Male 2P+T | ER03025-10R-P302 |
| P805 | | Option | | Option | ER03025-12R-P805 | |
| P412 | 17 m | H07RN-F | | Female 2P+T | Male 2P+T | ER03025-17R-P412 |
| P806 | 19 m | | | Option | Option | ER03025-19R-P806 |
| P422 | 20 m | | | Female 2P+T | Male 2P+T | ER03025-20R-P422 |

| Model | Length | Cable type | IP | Bracket | Plugs | Code |
|---------|--------|------------|----|---------|--------|---------------------|
| A710/65 | 10 m | H07RN-F | 65 | Swivel | Option | ER03025-10R-A710/65 |
| A715/65 | 15 m | | | | | ER03025-15R-A715/65 |
| S503F | 20 m | | | Fixed | | ER03025-20R-S503F |
| S503P | | | | Swivel | | ER03025-20R-S503P |
| S8V02 | 31 m | | | Option | | ER03025-31R-S8V02 |
| S8H05 | 41 m | | | | | ER03025-41R-S8H05 |

3G2,5² - IP65



4G2,5²



| Model | Length | Cable type | IP | Bracket | Code |
|-------|--------|------------|----|---------|-------------------|
| P515 | 9 m | H05VV-F | 42 | Swivel | ER04025-09V-P515 |
| P811 | 15 m | H07RN-F | | | ER04025-15R-P811 |
| P812 | 20 m | H05VV-F | | | ER04025-20V-P812 |
| S8V04 | 31 m | H07RN-F | 65 | Option | ER04025-31R-S8V04 |
| S8H07 | 41 m | | | | ER04025-41R-S8H07 |
| S8H09 | 55 m | | | | ER04025-55R-S8H09 |



5G2,5²



| Model | Length | Cable type | IP | Bracket | Code |
|-------|--------|------------|----|---------|-------------------|
| P520 | 7 m | IGUS CF77 | 42 | Swivel | ER05025-07P-P520 |
| P815 | 12 m | H07RN-F | | | ER05025-12R-P815 |
| P816 | 17 m | H05VV-F | | | ER05025-17V-P816 |
| S8V28 | 22 m | H07RN-F | 65 | Option | ER05025-22R-S8V28 |
| S8H33 | 31 m | | | | ER05025-31R-S8H33 |
| S8H35 | 55 m | | | | ER05025-55R-S8H35 |



Grounding



| Model | Section (mm ²) | Length | Delivered | IP | Code |
|-------|----------------------------|--------|-------------------|-------------------|------------------|
| P106 | 1x6 | 7 m | with clip | 42 | ER01060-07V-P106 |
| P306 | | 16 m | | | ER01060-16V-P306 |
| P502 | | 11 m | | | ER01160-11V-P502 |
| P801 | 1x16 | 22 m | | ER01160-22V-P801 | |
| S8H01 | | 32 m | | ER01160-32V-S8H01 | |
| S502 | 1x25 | 20 m | | 65 | ER01250-20V-S502 |
| S8H02 | | 32 m | ER01250-32V-S8H02 | | |



Clips 40A to 400A
Codes ERP...

AUTOMATIC CABLE REELS

GREEN REEL®



The cable unwinds and winds up automatically!
We no longer get our hands dirty.
Charging your car becomes quick and easy.

- 2 types of reels :
- with integrated charging station
 - to be installed after the charging station.



| Model | Max Power | Length | Power supply | Type 2 socket | Code |
|------------------------|-----------|-----------|------------------|------------------|-------------|
| GREEN REEL 3.7 station | 3,7 kW | 4 meters | Single-phase 16A | Output | ERVWB-T2 |
| GREEN REEL 7.4 | 7,4 kW | 10 meters | Single-phase 32A | Input and output | ERV07-S5-T2 |
| GREEN REEL 22 | 22 kW | | Three-phase 32A | | ERV22-S5-T2 |

2 types of automatic cable reels

| |
|--|
| You don't have a charging station |
| Single-phase |
| GREEN REEL 3.7 |
| with integrated charging station (3,7 kW) |



| | |
|------------------------------------|----------------------|
| You have a charging station | |
| Single-phase | Three-phase |
| maxi 7,4 kW | maxi 22 kW |
| GREEN REEL 7.4 | GREEN REEL 22 |



EV-REEL

Manual winder for your charging cable.

Code **EV-REEL**



MAGIC REEL

Automatic extension: the cable unwinds and winds up automatically.

| Model | Section | Length | Code |
|---------------|---------|--------|-------------|
| MAGIC REEL 10 | 3G2,5² | 10 m | ERU03025/10 |
| MAGIC REEL 17 | | 17 m | ERU03025/17 |



The UNMISSABLE: hose reels

Industrial quality - European manufacturing

Suitable for air and water.

3 years
Warranty



YP308KPU



YP310KPU



YP312KPU

Signal strip

Equipped with ribbon or chain.
8 meters or 20 meters.



Codes **ERS...**

AUTOMATIC CABLE REELS

Signal transmission

Self-retracting reels equipped with a special collector for data transmission: stable connection, signal continuity. IP42 or IP65.

Applications:
 - Ethernet networks (CAT 5E and CAT6)
 - medical systems
 - robotics, automation (special cables on request)

Codes ERT...



ATEX

The ATEX range includes several types of solutions:

- ATEX clamp
- non-ATEX reel (to be installed in safety zone) + ATEX clamp
- ATEX reel + ATEX clamp
- complete system (control unit non ATEX + ATEX reel + ATEX clamp)
- ATEX portable lamp.

Codes ERATX...



Our other ranges

PLT 100



Models P1...

PLT 500



Models P5...

PLT 600 - 600S



Models P6... and PS6...

PLT 800



Models P8...

ALU 700 - 700S ALU 700/65 - 700S/65



Models A7... and AS7...

STEEL 500



Models S5...

STEEL 800



Models S8...

STEEL 900



Models S9...

To receive an offer quickly
send us the following informations



By email : contact@cable-equipements.com
 By fax : +33 01 45 90 17 17
 By phone : +33 01 45 90 14 14



Number and section of conductors :

Use : horizontal vertical

Length :

Use : inside outside

Quantity :

Details of specific use :

.....

.....

Your data

Company name :

Your name :

e-mail :

Phone : Postal code and country :

CABLE PROTECTION

Pedestrian Crossing

BASEA

Flexible (in rolls)

Snapped at the base.

Delivered with a double-sided adhesive strip.





BASEA black

| Model | Material Color | Capacity | Width | Height | Weight per meter | 1,50 meter roll | 3 meters roll | 9 meters roll |
|----------|------------------|-------------------------------------|--------|--------|------------------|-----------------|---------------|---------------|
| BASEA 6 | Grey PVC | 1 cable Ø 6 mm or 2 cables Ø 4 mm | 52 mm | 9 mm | 0,28 kg | PCP06G150 | PCP06G300 | PCP06G900 |
| BASEA 10 | | 1 cable Ø 10 mm or 2 cables Ø 7 mm | 71 mm | 12 mm | 0,54 kg | PCP10G150 | PCP10G300 | PCP10G900 |
| BASEA 13 | | 1 cable Ø 13 mm or 2 cables Ø 9 mm | 86 mm | 18 mm | 0,82 kg | PCP13G150 | PCP13G300 | PCP13G900 |
| BASEA 16 | | 1 cable Ø 16 mm or 2 cables Ø 13 mm | 108 mm | 28 mm | 1,01 kg | PCP16G150 | PCP16G300 | PCP16G900 |
| BASEA 25 | Grey Elastomer* | 1 cable Ø 25 mm or 2 cables Ø 20 mm | 160 mm | 30 mm | 1,49 kg | PCP25G150 | PCP25G300 | PCP25G900 |
| BASEA 08 | Black Elastomer* | 1 cable Ø 8 mm or 3 cables Ø 6 mm | 65 mm | 10 mm | 0,49 kg | PCP08N150 | PCP08N300 | PCP08N900 |
| BASEA 14 | | 1 cable Ø 14 mm or 2 cables Ø 10 mm | 80 mm | 16 mm | 0,77 kg | PCP14N150 | PCP14N300 | PCP14N900 |
| BASEA 18 | | 1 cable Ø 18 mm or 3 cables Ø 13 mm | 80 mm | 20 mm | 1,11 kg | PCP18N150 | PCP18N300 | PCP18N900 |

*Elastomer models are recommended for an outdoor use.



BASEA grey



Pedestrian bridge


Economic - High capacity

Ground resting.

Easy to install (dovetails).

3 models :

PP13-1



PP26-1

PP30-7




| | Max capacity | Chanel size | Length | Width | Height | Weight | Color | Code |
|------------------------|--|-------------|---------|--------|--------|--------|--------|-----------|
| PEDESTRIAN BRIDGE 13-1 | 3 cables Ø 13 mm | 13x40 mm | 1 meter | 132 mm | 20 mm | 1,5 kg | Black | PP13A100N |
| | | | | | | | Yellow | PP13A100J |
| PEDESTRIAN BRIDGE 26-1 | 3 cables Ø 26 mm | 26x85 mm | 1 meter | 210 mm | 36 mm | 4 kg | Black | PP26A100N |
| PEDESTRIAN BRIDGE 30-7 | 3 cables Ø 30 mm + 2 cables Ø 27 mm + 2 cables Ø 22 mm | | 80 cm | 425 mm | 35 mm | 3,5 kg | Black | PP30G80 |



TOP 10-2

Floor trough roll (flexible PVC)

Double-sided adhesive strip. Grey.



| Max capacity | Number of channels | Width | Height | Rolls size | Weight | Code |
|------------------------------------|--------------------|-------|--------|------------|---------|-----------|
| 2 cables Ø 10 mm + 2 cables Ø 7 mm | 2 | 76 mm | 16 mm | 1,50 meter | 0,92 kg | PCT10B150 |
| | | | | 3 meters | 1,84 kg | PCT10B300 |
| | | | | 9 meters | 5,52 kg | PCT10B900 |



ONDEO

Elegant design

Detachable cover.

Angle and end point.

Polyurethane, 3 colors.



| Max capacity | Length | Width | Height | Weight | Color | Code |
|-------------------------------------|--------|--------|--------|---------|--------|----------|
| 2 cables Ø 12 mm + 2 cables Ø 10 mm | 87 cm | 120 mm | 21 mm | 1,20 kg | Grey | PN12D87G |
| | | | | | Yellow | PN12D87J |
| | | | | | Black | PN12D87N |

Floor troughs


Grey or Brown

Rigid bars.

Base + Cover.

Double sided adhesive provided.

PG12 : angle and accessories.

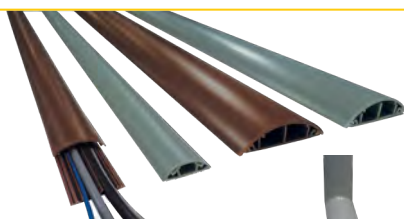


| Model | Max capacity | Length | Weight | Color | Code |
|-------|-------------------------------------|----------|---------|-------|-----------|
| PG06 | 1 cable Ø 6 mm or 2 cables Ø 5 mm | 2 meters | 0,25 kg | Grey | PG06A200G |
| | | | | Brown | PG06A200M |
| PG12 | 2 cables Ø 12 mm or 2 cables Ø 6 mm | 1 meter | 0,48 kg | Grey | PG12B100G |
| | | 2 meters | 0,96 kg | | PG12B200G |
| | | 2 meters | 0,96 kg | Grey | PG12B200M |
| | | | | Brown | PG12B200M |

DOUBLE

2 compartments

Grey elastomer.

Delivered with a double-sided adhesive strip.



| Max capacity | Number of channels | Width | Height | Rolls size | Weight | Code |
|------------------|--------------------|--------|--------|------------|---------|-----------|
| 5 cables Ø 10 mm | 2 | 107 mm | 17 mm | 1,50 meter | 2,16 kg | PCD10B150 |
| | | | | 3 meters | 4,32 kg | PCD10B300 |

Industrial packaging

Cable sheath

Office packaging



| Diameter | Color | Rolls delivered with 1 tool | Office packaging 2 meters + tool | Additional tool |
|----------|--------|-----------------------------|----------------------------------|-----------------|
| 8 mm | Black | 100 meters | MC08N100M | - |
| 15 mm | | 50 meters | MC15N50M | - |
| 20 mm | Silver | 30 meters | MC20N30M | MC20N150 |
| | | | MC20A30M | MC20A150 |
| 25 mm | Black | 20 meters | MC25N20M | - |
| 32 mm | | 15 meters | MC32N15M | - |





Vehicule Crossing

VOLGA

Flexible models (in rolls)
Temporary or less-intensive use



Snapped at the base, easy to insert cables without disconnecting them.
Black elastomer.

Light weight, easy to install and to store.

| Model | Cable max. Ø | Schema | Length | Code |
|------------|--------------|--------|--------|-----------|
| VOLGA 15 | 15 mm | | 2,50 m | PCV15A250 |
| | | | 5 m | PCV15A500 |
| VOLGA 1x23 | 23 mm | | 2,50 m | PCV23A250 |
| | | | 5 m | PCV23A500 |
| VOLGA 2x23 | 23 mm | | 2,50 m | PCV23B250 |
| | | | 5 m | PCV23B500 |
| VOLGA 3x23 | 23 mm | | 2,50 m | PCV23C250 |
| | | | 5 m | PCV23C500 |
| VOLGA 25 | 25 mm | | 2,50 m | PCV25A250 |
| | | | 5 m | PCV25A500 |
| VOLGA 35 | 35 mm | | 2,50 m | PCV35A250 |

VOLGA BANDES JAUNES

Flexible models (in rolls)
Temporary or less-intensive use



Snapped at the base, easy to insert cables without disconnecting them.
Black elastomer and yellow stripes.

Light weight, easy to install and to store.

| Model | Cable max. Ø | Schema | Length | Code |
|--------------|--------------|--------|--------|------------|
| VOLGA 1x23 J | 23 mm | | 2,50 m | PCV23A250J |
| | | | 5 m | PCV23A500J |
| VOLGA 2x23 J | 23 mm | | 2,50 m | PCV23B250J |
| | | | 5 m | PCV23B500J |
| VOLGA 3x23 J | 23 mm | | 2,50 m | PCV23C250J |
| | | | 5 m | PCV23C500J |
| VOLGA 30 J | 30 mm | | 1 m | PCV30A100J |

VOLGA BASIC

Flexible models (in rolls)
Temporary or less-intensive use
Open on the top



VOLGA BASIC 20 and 40 : black
VOLGA BASIC 60 : with yellow stripes and 2 rigid metal rods

| Model | Cable max. Ø | Schema | Length | Code |
|----------------|--------------|--------|--------|------------|
| VOLGA BASIC 20 | 20 mm | | 4,50 m | PCB20A450 |
| | | | 9 m | PCB20A900 |
| VOLGA BASIC 40 | 40 mm | | 4 m | PCB40A400 |
| VOLGA BASIC 60 | 60 mm | | 1 m | PCB60A100J |

VEHICLE BRIDGES10T

Vehicles up to 10 tons

Cables are laying down on the ground.
Black.
Ribbed surface.
Nestable elements (dovetails).



| Model | Cable max. Ø | Schema | Length | Code |
|---------|--------------|--------|--------|----------|
| PV 2x37 | 37 mm | | 98 cm | PV037B98 |
| PV 3x35 | 35 mm | | 98 cm | PV035C98 |

VEHICLE BRIDGES 50T

Vehicles up to 50 tons

Cables are laying down on the ground.
Withstands the passage of heavy trucks.
Ribbed surface.
Nestable elements (H of connection).



| Model | Cable max. Ø | Schema | Length | Code |
|----------|--------------|--------|--------|-----------|
| PV 2x85 | 85 mm | | 50 cm | PV085B050 |
| PV 1x120 | 120 mm | | 50 cm | PV120A050 |



Vehicle Crossing

COBRA

Economic range.
All uses, even intensive.



Black base elastomer, yellow hinged cover.
Rigid elements, dovetail insert to maintain elements together 45° angles and finishes available for specific models. Fixation holes on specific models.

| Model | Cable max. Ø | Charge maxi par pneu testée LNE* (avec câble) | Schema | Length | Code |
|------------|--------------|---|--------|--------|-----------|
| COBRA 32-2 | 32 mm | 4,9 tons | | 1 m | PAC32B100 |
| COBRA 31-3 | 31 mm | 4,9 tons | | 90 cm | PAC31C90 |
| COBRA 31-4 | 31 mm | 4,9 tons | | 90 cm | PAC31D90 |
| COBRA 38-5 | 38 mm | 4,5 tons | | 89 cm | PAC38E89 |
| COBRA 50-3 | 50 mm | 5,4 tons | | 89 cm | PAC50C89 |
| COBRA 82-2 | 82 mm | 5,9 tons | | 90 cm | PAC82B90 |

Laboratoire National d'Essais (rapport d'essai n° P145630)

BOA

Premium range.
All uses, even intensive.
Lockable tap.




Also for RENT

Black base, yellow hinged cover.
BOA 17-6 available with black base, yellow hinged cover. Polyurethane.
Rigid elements, dovetail insert to maintain elements together 45° Angles and finishes available for specific models. Fixation holes on specific models.

Can be customized with a logo.


| Model | Cable max. Ø | Max weight per 20x20cm | Schema | Length | Code |
|-----------|--------------|------------------------|--------|--------|------------------------|
| BOA 17-6 | 17 mm | 2 tons | | 1 m | PA17F100J PA17F100N |
| BOA 35-3 | 35 mm | 2 tons | | 1 m | PA35C100 |
| BOA 35-5 | 35 mm | 5 tons | | 87 cm | PA35E87 |
| BOA 45-4 | 45 mm | 3,5 tons | | 70 cm | PA45D70 |
| BOA 49-3 | 49 mm | 5 tons | | 1 m | PA49C100 |
| BOA 62-5 | 62 mm | 5 tons | | 70 cm | PA62E70 |
| BOA 117-2 | 117 mm | 5 tons | | 70 cm | PA117B70 |

Crossing Ramps



| Model | Cable max. Ø | Length | Code |
|-----------|--------------|--------|-----------|
| RAMPE 70 | 70 mm | 30 cm | PAR070B30 |
| RAMPE 121 | 121 mm | 29 cm | PAR121B29 |

CAPA



Rigid cover fixed by 2 selfadhesive strips.
6 models.

Gutters



To bury (passage of pedestrians and light vehicles).
With cover.
3 models.

Codes CAN ...


The BOX



Storage container for storing and transporting cable protections.

Code PACBOX

Speed bumps for cables

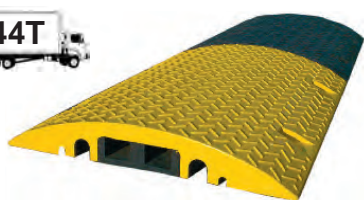

| Cable max. Ø | Dimensions | Color | Code |
|---------------------|-----------------------|--------|------------|
| 38 mm | L80 cm x l60cm x H8cm | Black | PARALNOIR |
| | | Yellow | PARALJAUNE |
| Concrete anchors x4 | | | PAFIX4 |

Speed bumps




Modular
(1 RALMODUL-50-100
+ 1 RALMODUL-50-EXT)



Monoblock
(1 RALMONO-50-100
+ 2 RALMONO-50-EXT)

| Model | Element | Sales unit | Dimensions | Code |
|-----------|------------|--------------|----------------|-----------------|
| Monoblock | Speed bump | Unit | 1830x300x45 mm | RALMONO-50-183 |
| | End cap | | 190x300x45 mm | RALMONO-50-EXT |
| Modular | Speed bump | Pair (1Y+1B) | 1000x350x50 mm | RALMODUL-50-100 |
| | End caps | | 170x350x50 mm | RALMODUL-50-EXT |
| Roll-Up | Speed bump | Unit | 3000x220x40 mm | RALROUL-40-300 |

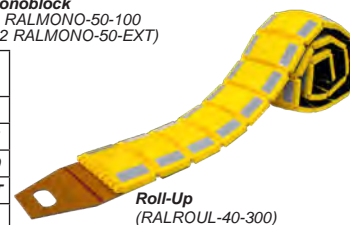

Roll-Up
(RALROUL-40-300)



Headquarters and factory

21 rue Sadi Carnot
94880 Noiseau (France)
e-mail : contact@cable-equipements.fr

Commercial office

Worringer Straße 30
D-50668 Köln (Deutschland)
e-mail : kontakt@cable-equipements.com

Tel. : (+33) 01 45 90 14 14
www.cable-equipements.com

Cachet distributeur

